


CURB, GUTTER & SIDEWALK SCRIBE LINE DETAIL  
NOT TO SCALE

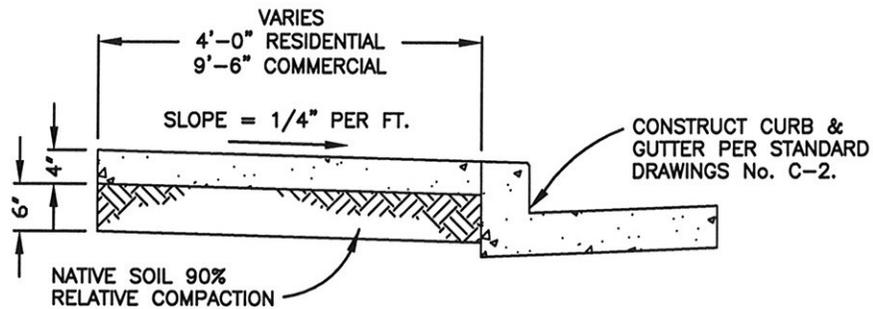

CURB, GUTTER AND SIDEWALK CROSS-SECTION  
NOT NO SCALE


NOTES:

1. FORMS TO REMAIN FOR A MIN. OF 24 HOURS.
2. WOOD FORMS SHALL HAVE A NOMINAL THICKNESS OF 2", EXCEPT ON CURVE CONSTRUCTION WHERE THE THICKNESS SHALL BE DETERMINED BY THE CITY ENGINEER.
3. SEE CONCRETE NOTES (C-1) AND CITY STANDARD SPECIFICATIONS.
4. EXPANSION JOINTS SHALL BE INSTALLED WITHIN CURVILINEAR SIDEWALKS AT MIN. 60 FEET O.C.
5. CONCRETE SHALL BE MINIMUM FIVE SACK MIX. (2500 P.S.I. MIN. IN 28 DAYS).

CITY of CORCORAN • Department of Public Works

Standard Drawing for:

**ADJACENT SIDEWALK DETAIL**

APPROVED:  City Engineer

05/19/08  
Date

Revised:

**C-4a**