


NOTES:

1. FENCE TO BE PLACED ON FOOT INSIDE OF LOT LINE.
2. MAXIMUM DEPTH OF WATER IN PONDING BASIN 3'-0".
3. FENCE POST TO BE PLACED IN CLASS "B" PCC CONCRETE.
4. ACCESS GATE 12'-0" MINIMUM (DOUBLE GATE).
5. ENTIRE AREA OF PONDING LOT TO BE TREATED WITH SOIL STERILANT TO EDGE OF INSIDE OF FENCE OR TO BACK OF CONCRETE CURB OR SIDEWALK.
6. THE SOIL STERILANT TO BE USED AND RATE OF APPLICATION MUST BE APPROVED BY PUBLIC WORKS DIRECTOR BEFORE BEING APPLIED.
7. WHERE PONDING BASIN IS ON CORNER LOT, FENCE SHALL FOLLOW CURVE OF LOT LINE.
8. AT THE PUBLIC WORKS DIRECTOR'S DISCRETION THE DEVELOPER MAY BE REQUIRED TO SUBMIT FOR APPROVAL DETAILS AND SPEC'S FOR EITHER GRAVITY DISCHARGE OR PUMPING OF STORM WATER FROM POND TO STORM SYSTEM. STANDING STORM WATER WILL NOT BE ALLOWED.
9. FENCE POST LOCATIONS AND POST SIZE PER DETAILS M-11 AND M-12.
10. LOCATION OF GATE AND SWING OF GATE TO BE DIRECTED BY PUBLIC WORKS DIRECTOR.
11. LANDSCAPE OF POND TO BE APPROVED BY DEPT. OF PUB. WORKS.

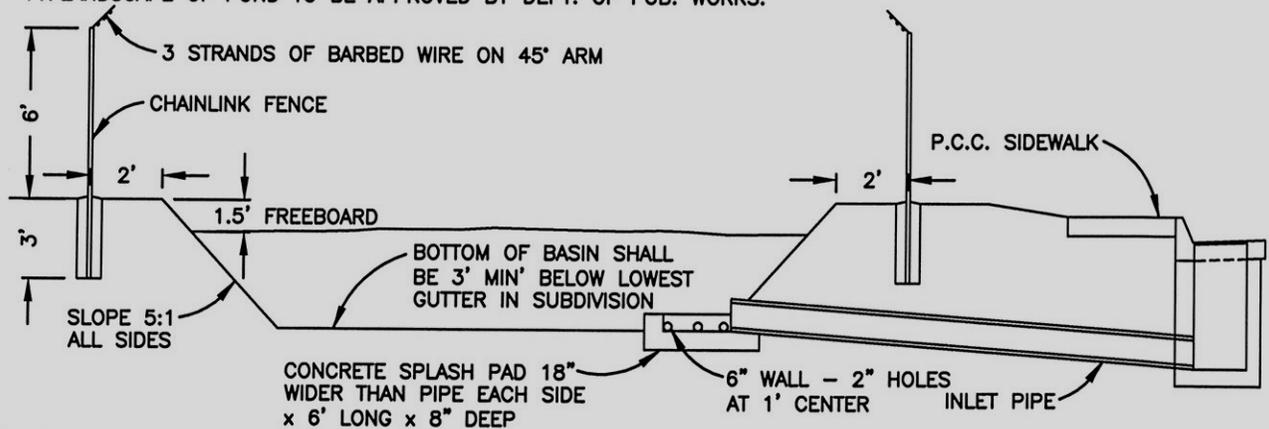

CITY of CORCORAN • Department of Public Works

Standard Drawing for:

PONDING BASIN DETAIL

APPROVED: City Engineer

05/19/08
Date

Revised:

SD-5